




Be ahead



IGEA

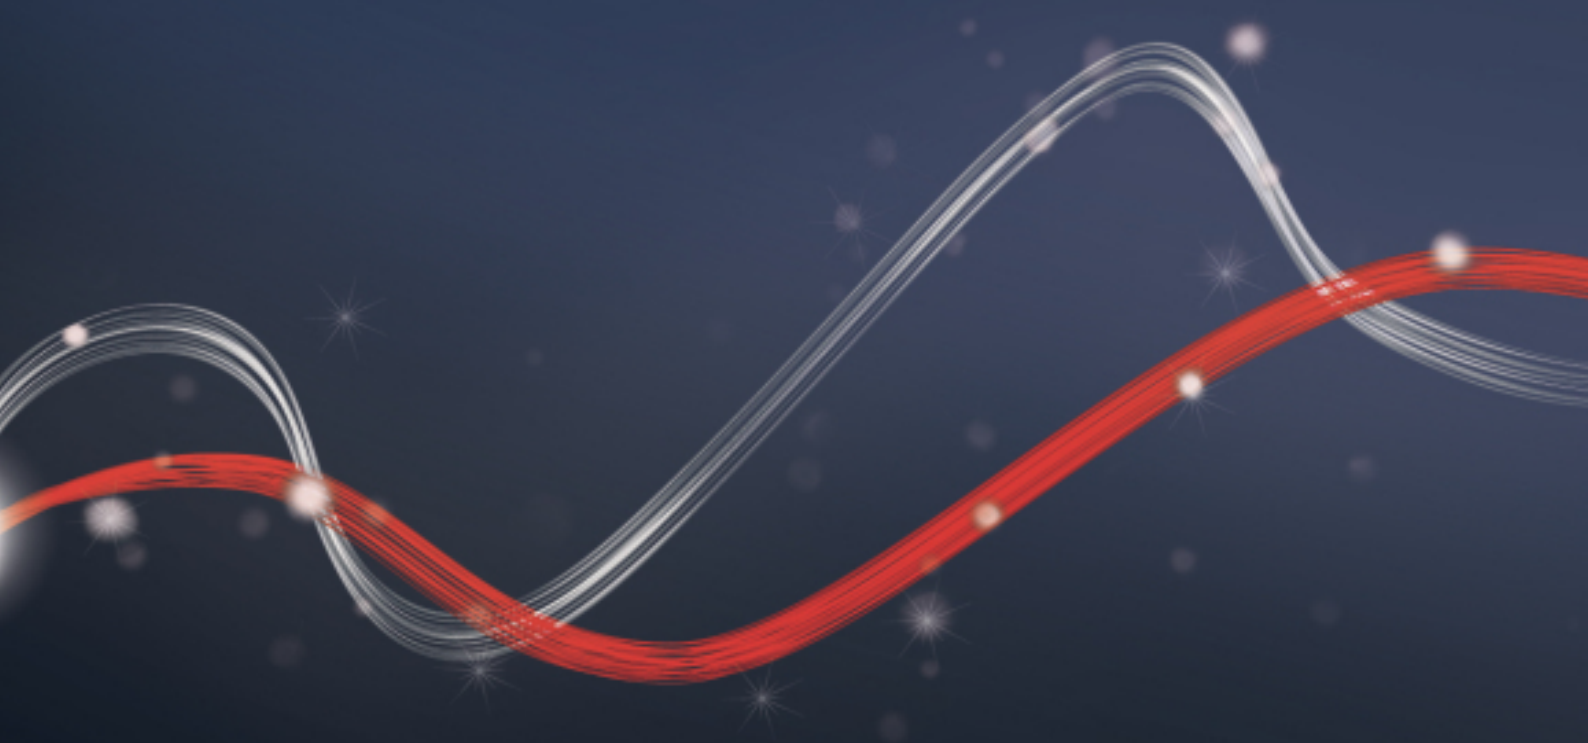

Product

PLUS

CONTROL UNIT
TECHNICAL FEATURES

ACCESSORIES

DISCOVER U-LINK



ee link



er ready

Range of electromechanical operators with articulated arm for residential use, for swing gate leaves of up to 2.5 metres and 250 kg.
Ideal for installation on large-size pillars thanks to its articulated levers that allow opening up to 125°.

IGEA

Code	Name	Description
P935065 00002	IGEA	Electromechanical operator 230 V for swing gates up to 250 kg in weight and 2.5 m in length.
R935221 00002	KIT IGEA FRA	Complete kit 230 V for sliding gates up to 250 kg in weight and 2.5 m in length.

· Product

· **PLUS**

· CONTROL UNIT
· TECHNICAL FEATURES

· ACCESSORIES

· **DISCOVER U-LINK**

PLUS




Aluminium structure with high-resistance paint treatment.



Built-in, adjustable, single-cable electromechanical limit switch system.



Control unit with programming display, automatic setting menu, simplified programming and virtual encoder.

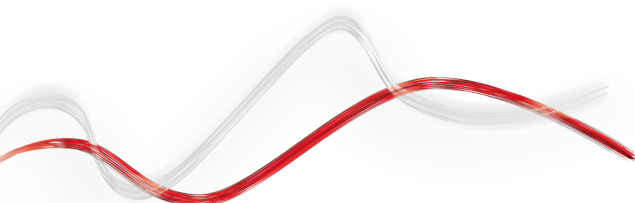

• Product

• PLUS

• **CONTROL UNIT**
• **TECHNICAL FEATURES**

• ACCESSORIES


• **DISCOVER U-LINK**

ALTAIR P D113703 00002 Recommended

Control panel with display for one or two 230V/300W operators for swing gates and industrial folding doors



- Application: control panel for one or two operators for swing gates
- Board power supply: 230V single-phase
- Operators power supply: 230V single-phase 300W max each operator
- Main features: removable terminal blocks, programming with display and built-in dual channel receiver
- Main functions: stays locked when closed, 3/4 step logic, partial opening, fast closing and self-diagnostics
- Compatibility: ALTAIR and ARIES

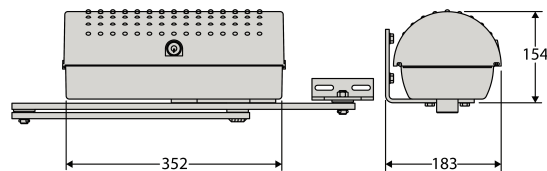

	IGEA
Control unit	ALTAIR P
Power supply	230 V
Power input	300 W
Maximum angle	125 °
Cycle time	15 sec
Type of limit switch	electromechanical
Locking	mechanical
Release	knob operated with personal key
Frequency of use	intensive
Environmental conditions	from -15 °C to 60 °C
Protection rating	IP44
Operator weight	16 kg
Impact reaction	electric clutch
Operator type	electromechanical swing operators with articulated arm

• Product

• PLUS

• CONTROL UNIT
• TECHNICAL FEATURES

• ACCESSORIES

• DISCOVER U-LINK

	Code	Name	Description
	D113693 00003	RIGEL 5	Universal control panel with display for one or two 230V - 600+600W operators
	D113703 00002	ALTAIR P	ALTAIR P control panel
	N190104	BIR C	Rubber safety edge (H 30 mm), price per m
	P111401 00001	VENTIMIGLIA NS	Infrared device for BIR C or BAR C safety edges (conforms to EN 12978 Standard)
	P135005	LRV	Short arm for IGEA, IGEA BT - LRV
	P121023	Q.BO KEY WM AV	Vandalproof key selector with double contact, for outdoor use. Metal structure. Vandalproof key selector with metal structure. Vandalproof key selector with double contact, for outdoor use. Metal structure.
	P121022	Q.BO KEY WM	
	N574039	BOX	Wall-mounted safe for steel cable release and electric control
	D113749 00002	RADIUS B LTA 230 R2	Flashing light without incorporated antenna for motors with power supply 230 V.
	D113748 00002	RADIUS B LTA 230 R1	Flashing light with incorporated antenna for motors with power supply 230 V.
	P123025	B 00 R02	Wall mounting for B LTA series flashing beacons
	P123026	B 00 R01	Metal guard for B LTA
	D111904	MITTO B RCB02 R1	Transmitter with 2 channels. Range 50/100 m. Power supply 12 V with 1 battery type 23 A
	P121024	Q.BO TOUCH	Wireless digital touchpad with 433MHz rolling code operation. Manages up to 10 channels and 100 codes.
	P111526	DESME A15	Pair of self-aligning photocells. Range 30 m. Power supply 24 V ac/dc. Pair of self-aligning photocells. Range 30 m. Power supply 24 V ac/dc.






· Product


· PLUS

· CONTROL UNIT
· TECHNICAL FEATURES

· **ACCESSORIES**

· DISCOVER U-LINK

	Code	Name		Description
	P111528	THEA A15 O.PF		Pair of adjustable photocells with integrated flashing light. Possibility of directing the beam 40 ° horizontally and 10 ° vertically. IR signal synchronised to prevent any risk of blinding. Range 30 m. Power supply 24 V ac/dc. For external application.
	P903018	PHP		Pair of aluminium posts for THEA/DESME series photocells Height 522 mm
	D831081	CMS		Sign

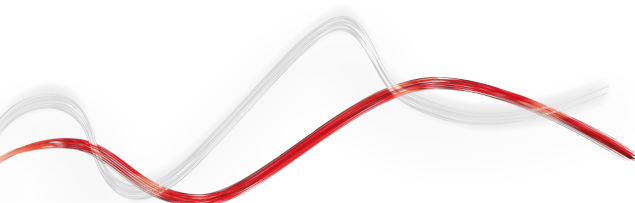

· Product

· PLUS

· CONTROL UNIT
· TECHNICAL FEATURES

· ACCESSORIES

· DISCOVER U-LINK

What is U-Link?

The innovative technology that gives you new power

An exclusive Bft innovation: U-Link (Universal Link) is an exclusive Bft platform that allows the creation of technological ecosystems. In Home Automation Access, it allows communication with all the home access automation devices of any brand. So you save time and can control everything with ease, without any worries.

It is intuitive

Easy to install and use

It is scalable

Allows an unlimited number of devices to be added

It is flexible

Allows the creation of groups of interconnected products

It is practical

Works with or without a web connection

It is functional

Parameters can be controlled remotely via dedicated applications

· Product

· PLUS

· CONTROL UNIT
· TECHNICAL FEATURES

· ACCESSORIES

· DISCOVER U-LINK

All in one scheme: discover this amazing technology

A unique platform **allowing the creation of technological ecosystems** offering a wide range of solutions for different sectors.

Thanks to the B-Eba cards and the Clonix U-Link receiver, this proprietary platform featured by Bft products adapts to any protocol and access automation product (even BFT, non-native U-Link or non-BFT products), and is used in various sectors. Each device thus becomes smart and can be interconnected with other systems, thanks to a language that becomes universal.

U-Base 2



Software to install and easily and comfortably carry out maintenance and identify any malfunction of U-link compatible operators.

U-SDK



U-SDK is the innovative application that can make Bft automation systems compatible and easily integrated with a BMS network for the supervision of buildings.



Magistro

An innovative and easy to install system for easily managing all home automation systems.



U-Control

U-Control is the application that helps the quick and easy integration of BFT automation systems in large building management systems.



Blue-Entry

Technology abreast of the times and attentive to daily needs: thanks to the use of U-link the house gate can now be opened with just your smartphone.



Clonix U-Link

Allows the connection of non-native U-Link products or non-Bft products to U-Link systems.

Bft operators, non-native U-Link products or a product belonging to other brands: can they be connected to U-Link? Yes, thanks to the Clonix receivers. Accessories that know no limits.




B-eba

A direct line with your operators.

B-eba expansion cards allow the connection of external devices, such as PCs, smartphones and tablets, to a Bft operator or Clonix receiver, or the connection of several Bft products in a U-Link network. These accessories integrate with U-Link technology and Bluetooth, Z-Wave, TCP/IP protocols, as well as the RS485 serial connection.

A device that fully translates what Bft means for interconnectivity.

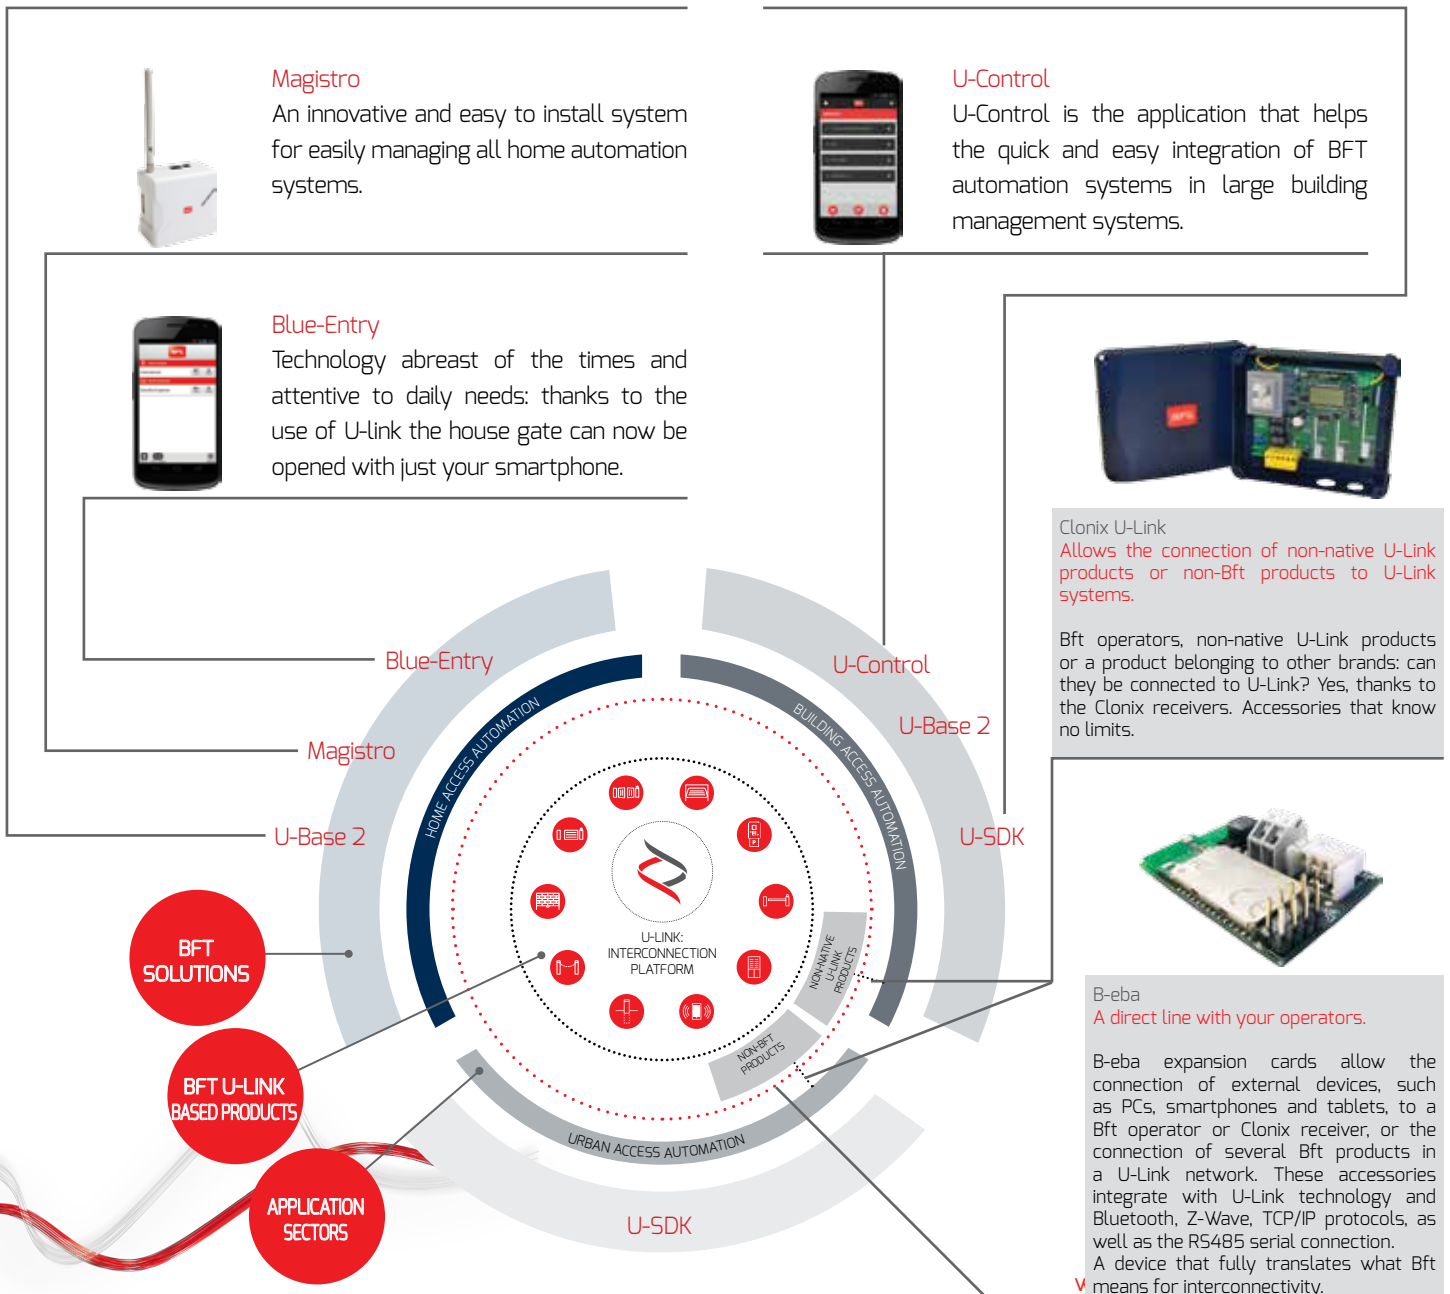

BFT SOLUTIONS

BFT U-LINK BASED PRODUCTS

APPLICATION SECTORS



INFORMATION REGARDING THE PROTECTION OF THE INDUSTRIAL AND INTELLECTUAL PROPERTY RIGHTS OF BFT. BFT S.p.A. protects its industrial property by depositing trademarks, patents, models and designs. The intellectual property of BFT S.p.A. is protected by copyright law. BFT S.p.A. also protects its know-how by taking measures to protect the technical and commercial information inherent in its company and products. All the products in this catalogue are ORIGINAL BFT MODELS and only BFT S.p.A is authorised to produce them and market them anywhere in the world. All the commercial names in this catalogue are owned by BFT S.p.A., and only BFT S.p.A. is authorised to use them in relation to the corresponding merchandise category. FALSIFIERS WILL BE PROCEEDED AGAINST IN ACCORDANCE WITH BOTH CIVIL AND CRIMINAL LAW. THESE CONDITIONS NOT ONLY GUARANTEE THE INTELLECTUAL PROPERTY RIGHTS OF BFT, BUT ALSO PROTECT CUSTOMERS BY GUARANTEEING THAT THE PRODUCTS THEY ARE PURCHASING ARE ORIGINAL BFT PRODUCTS RESULTING FROM STUDIES AND DESIGNS WITHIN THE BFT COMPANY.