

Airtight Door | Sliding Door | Telescopic 3-Wings Door | Telescopic 2-Wings Door | Curved/Round Door | Swing Door | Heavy Duty Door



KING TA HAN TECHNOLOGY CO. LTD.

Location: Kaohsiung,Taiwan
Global Website: http://www.kth-automaticdoor.com
E-mail address: export@kthtw.com
kth@kthtw.com


A-2 AIRTIGHT DOOR

AUTOMATIC DOOR SYSTEM SERIES

REGISTRATION NUMBER: 8476815113

A-2 AIRTIGHT DOOR


AIRTIGHT DOORS/SINGLE-WINGED

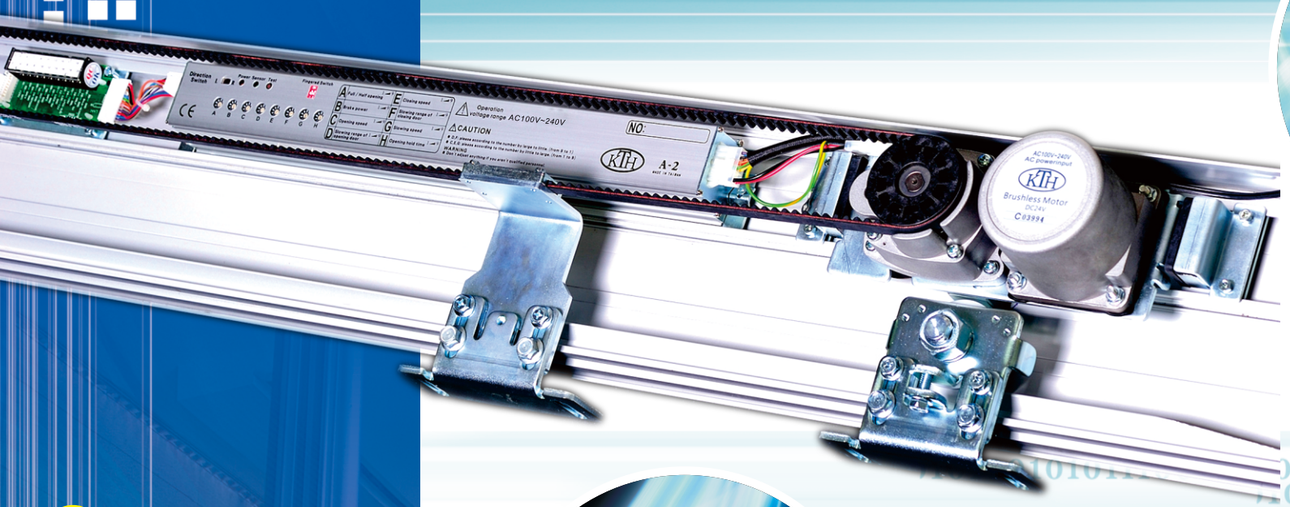



HANGERS

☆ Stable and durable
☆ Quiet and smooth

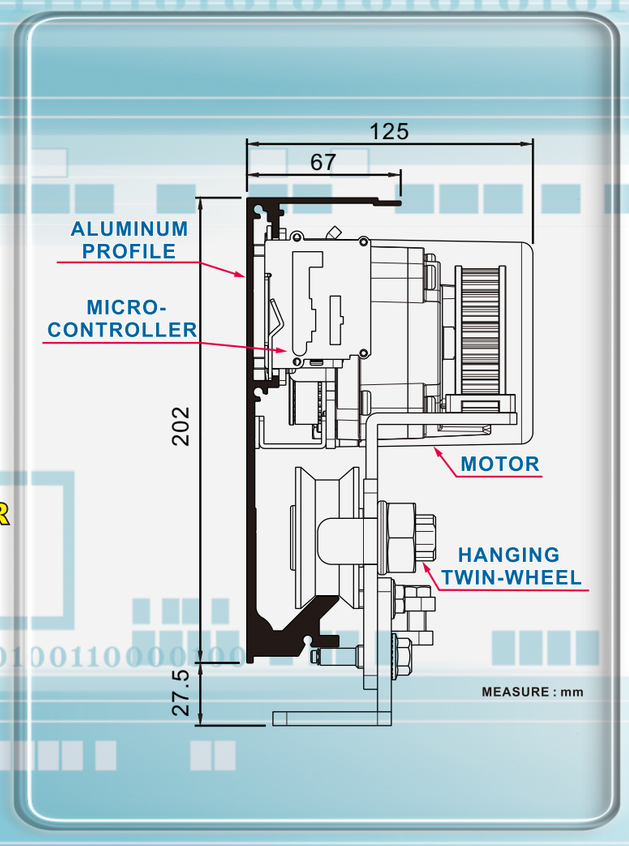



BRUSHLESS DC MOTOR

☆ 120W Brushless DC motor



MICRO-CONTROLLER

☆ Intelligence operator provides 8 functions of door's motions.



FILLISTER

☆ Within this design,it can make door downward and toward inside to create "AIRTIGHT"function.

FEATURES

- Applied for hospital ,cleaning room.
- Efficiently avoid outer air to get in or temperature affection.
- Smooth operating and running frequently is unobstructed due to use Deft Volume&high efficient Brushless DC Motor.
- Closed door is alright, through "V"mold and "Arc"mold of fillister of Aluminum Profile to make door download and toward inside when closing.

TYPE	A-2
MODEL	STANDARD SINGLE-WINGED
DOOR WEIGHT	200kg X1(DOOR)
DOOR WIDTH	500mm~3000mm
INSTALL WAY	SURFACE INSTALL
MOTOR	DC24V 120W BRUSHLESS DC MOTOR
CONTROL	STANDARD MICRO-CONTROL
POWER CONSUMPTION	120W
VOLTAGE	AC100V~240V
ENVIRONMENTAL TEMPERATURE	-20℃~+50℃
VOLUME	60 DECIBEL(MAX.)
STARTING SPEED	480mm/SEC.
STARTING TIMES	0~20 SEC. (REGULABLE)
TRANSMISSION IMPORTANT CONDITION	RACK BELT S8M
OPENING DOOR RANGE	FULL/HALF-OPEN (REGULABLE)
PFC POWER EFFICIENCY	0.95(IN AC100V FULL LOAD)
TRACTION FORCE	3.5 kg