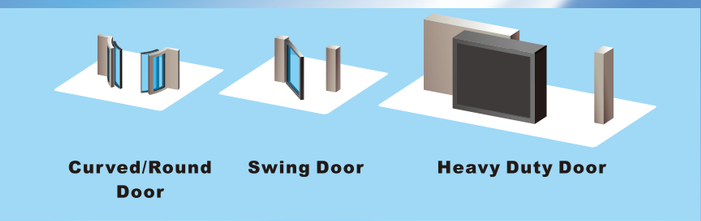

KING TA HAN TECHNOLOGY CO. LTD.

Location: Kaohsiung,Taiwan
Global Website: http://www.kth-automaticdoor.com
E-mail address: export@kthtw.com
kth@kthtw.com

SW-2 SWING DOOR

AUTOMATIC DOOR SYSTEM SERIES

GlobalGROUP ISO 9001 · UKAS MANAGEMENT SYSTEMS 0039
REGISTRATION NUMBER: 8476815113
CE

SW-2 SWING DOOR

● OUTWARD ARM ASSEMBLY

● INWARD ARM ASSEMBLY

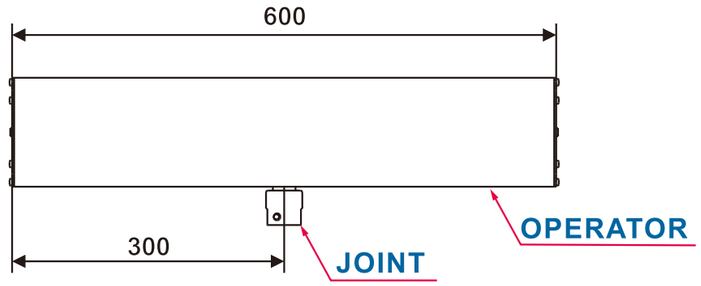

FRONT VIEW

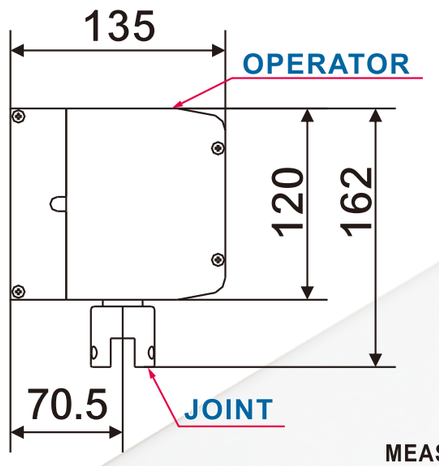

MEASURE : mm

SIDE VIEW

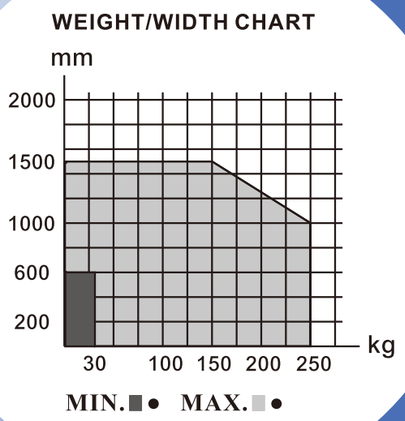

- **LOADING WEIGHT**: 250KG X 1M/150KG X 1.5M
- **"CATCH RETURN"** FUNCTION, IT MUST BE SAFER FOR USER.
- **PARTICULAR MEMORY MODE FOR** "OPENING DISTANCE SETTING".
- **TWO LOCK FUNCTIONS COULD BE CHOSEN:** (FAIL-SAFE/FAIL-SECURE) ELECTRIC LOCK.

SPECIFICATION

TYPE	SW-2	
MODEL	OUTWARD	INWARD
MOTOR	DC24V 120W BRUSHLESS DC MOTOR	
CONTROL	STANDARD MICRO-CONTROL	
POWER CONSUMPTION	120W	
VOLTAGE	AC100V~240V	
ENVIRONMENTAL TEMPERATURE	-20℃~+50℃	
VOLUME	55 DECIBEL(MAX.)	
SPEED of OPENING 90° TIME	0.2~0.5 SEC.(MAX.)	
STARTING TIMES	0~20 SEC. (REGULABLE)	
TRANSMISSION IMPORTANT CONDITION	OUTWARD ARM ASSEMBLY	INWARD ARM ASSEMBLY
OPENING DOOR RANGE	120° (MAX.)/90° (DEFAULT)	
PFC POWER EFFICIENCY	0.95(IN AC100V FULL LOAD)	
TRACTION FORCE	2.5 kg	

AUTOMATIC DOOR SYSTEM